


E2AG 2550



CHARACTERISTICS

- Coupling obtained from one piece of material and realised from a highly flexible aluminium.
- Backlash, vibration and maintenance free.
- Unique misalignment correction, high torque rigidity.
- High maximum torque.

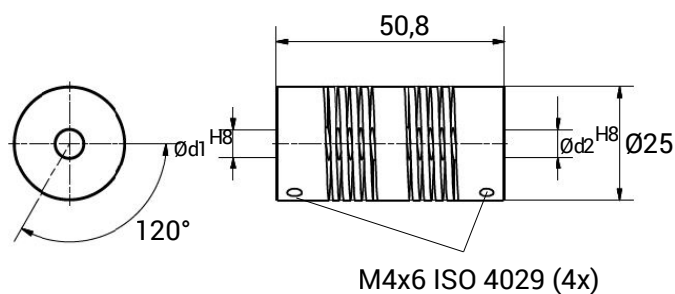

TECHNICAL DATA		
Maximum speed	min ⁻¹	8.000
Maximum torque	Nm	3,5
Radial misalignment max.	mm.	± 0,3
Axial misalignment max.	mm.	± 1
Angular misalignment max.	degree	± 30
Torsional stiffness	Nm/rad	10,5
Moment of inertia	gcm ²	42,6
Clamping torque max.	Ncm	120
Working temperature range	°C	-30/+150
Weight	g	25
Material		Aluminium

DIMENSIONS		
External diameter	Ø	25
Lenght	mm.	50,8
Screw thread		M 4x6
Standard hole combinations d1 H8 / d2 H8	mm.	6/6 - 6/8 - 6/10 - 6/12 - 8/8 - 8/10 8/12 - 10/10 - 10/12 - 12/12