


E6AV 1323



CHARACTERISTICS



- Coupling obtained from one piece of material with double start.
- Clamp fixing system.
- Suited to countless applications.
- Backlash, vibration and maintenance free.
- Unique misalignment correction.
- High torque rigidity.
- High maximum torque.

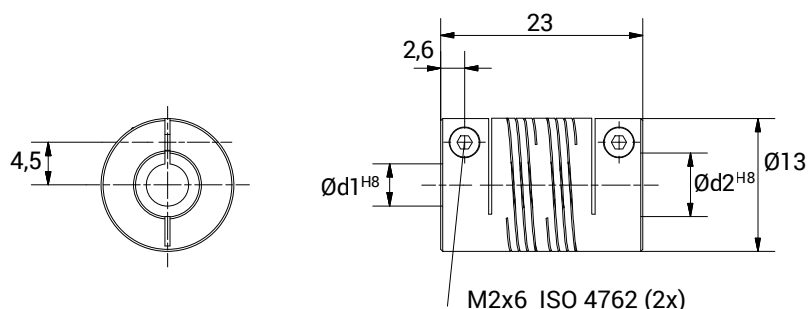

TECHNICAL DATA		
Maximum speed	min ⁻¹	5.000
Maximum torque	Nm	2
Radial misalignment max.	mm.	± 0,17
Axial misalignment max.	mm.	± 0,25
Angular misalignment max.	degree	± 5
Torsional stiffness	Nm/rad	12
Radial stiffness	N/mm	40
Moment of inertia	gcm ²	1,2
Clamping torque max.	Ncm	30
Working temperature range	°C	-40/+140
Weight	g	5
Material		Aluminium

DIMENSIONS		
External diameter	Ø	13
Length	mm.	23
Screw thread		M 2x6
Screw position	mm.	2,6
S	mm.	4,5
Standard hole combinations d1 H8 / d2 H8	mm.	4/4 - 4/5 - 4/6 - 5/5 - 5/6 - 6/6