


E6AV 3258



CHARACTERISTICS

- Coupling obtained from one piece of material with double start.
- Clamp fixing system.
- Suited to countless applications.
- Backlash, vibration and maintenance free.
- Unique misalignment correction.
- High torque rigidity.
- High maximum torque.

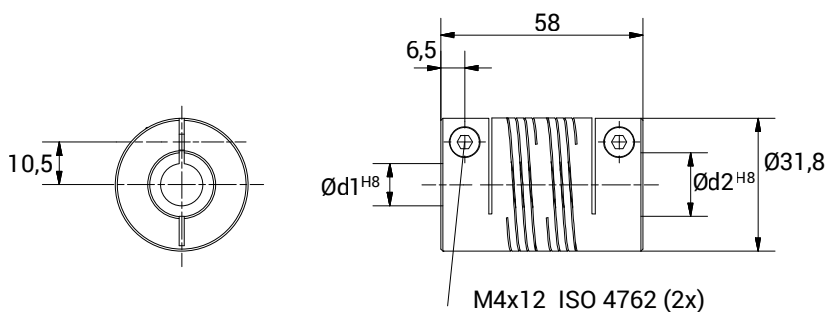

TECHNICAL DATA		
Maximum speed	min ⁻¹	5.000
Maximum torque	Nm	15
Radial misalignment max.	mm.	± 0,5
Axial misalignment max.	mm.	± 0,25
Angular misalignment max.	degree	± 7
Torsional stiffness	Nm/rad	125
Radial stiffness	N/mm	60
Moment of inertia	gcm ²	147
Clamping torque max.	Ncm	150
Working temperature range	°C	-40/140
Weight	g	93
Material		Aluminium

DIMENSIONS		
External diameter	Ø	31,8
Length	mm.	58
Screw thread		M 4x12
Screw position	mm.	6,5
S	mm.	10,5
Standard hole combinations d1 H8 / d2 H8	mm.	10/10 - 10/12 - 10/14 - 10/16 - 12/12 12/14 - 12/16 - 14/14 - 14/16 - 16/16