


E6AV 3867



CHARACTERISTICS

- Coupling obtained from one piece of material with double start.
- Clamp fixing system.
- Suited to countless applications.
- Backlash, vibration and maintenance free.
- Unique misalignment correction.
- High torque rigidity.
- High maximum torque.

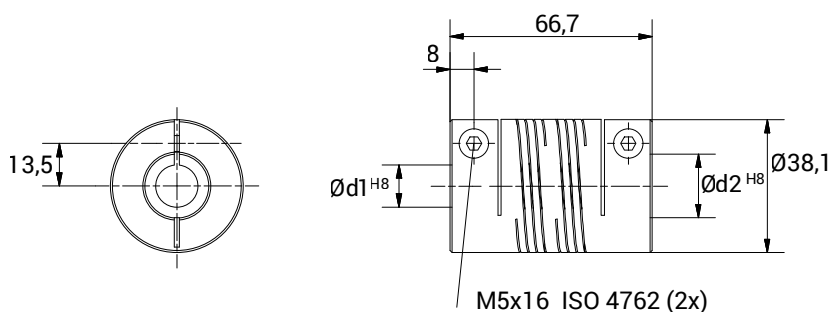

TECHNICAL DATA		
Maximum speed	min ⁻¹	5.000
Maximum torque	Nm	22
Radial misalignment max.	mm.	± 0,60
Axial misalignment max.	mm.	± 0,25
Angular misalignment max.	degree	± 7
Torsional stiffness	Nm/rad	200
Radial stiffness	N/mm	70
Moment of inertia	gcm ²	319
Clamping torque max.	Ncm	400
Working temperature range	°C	-40/140
Weight	g	141
Material		Aluminium

DIMENSIONS		
External diameter	Ø	38,1
Length	mm.	66,7
Screw thread		M 5x16
Screw position	mm.	8
S	mm.	13,5
Standard hole combinations d1 H8 / d2 H8	mm.	12/12 - 12/14 - 12/16 - 12/18 - 12/19 12/20 - 14/14 - 14/16 - 14/18 - 14/19 14/20 - 16/16 - 16/18 - 16/19 - 16/20 18/18 - 18/19 - 18/20 - 19/19 19/20 - 20/20