


GEAG 6508



CHARACTERISTICS



- Coupling obtained from one piece of material.
- Suited to countless applications. Backlash, vibration and maintenance free.
- Unique misalignment correction.
- High torque rigidity.

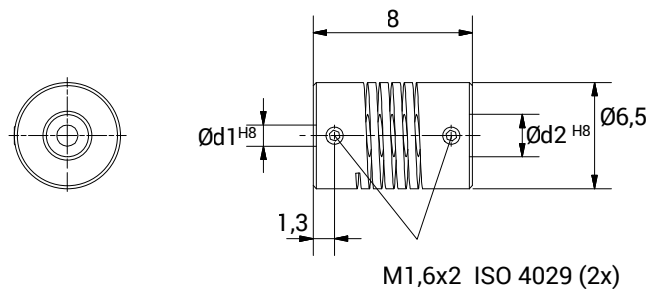

TECHNICAL DATA		
Maximum speed	min ⁻¹	8.000
Maximum torque	Ncm	2
Radial misalignment max.	mm.	± 0,1
Axial misalignment max.	mm.	± 0,15
Angular misalignment max.	degree	± 2
Torsional stiffness	Nm/rad	0,55
Radial stiffness	N/mm	24
Moment of inertia	gcm ²	0,02
Clamping torque max.	Ncm	8
Working temperature range	°C	-30/+150
Weight	g	0,5
Material		Aluminium

DIMENSIONS		
External diameter	Ø	6,5
Length	mm.	8
Screw position	mm.	1,3
Screw thread		M 1,6x2
Standard hole combinations d1 H8 / d2 H8	mm.	1/1 - 1/1,5 - 1/2 - 1,5/1,5 - 1,5/2 - 2/2