


GEAV 2532



CHARACTERISTICS

- Coupling obtained from one piece of material.
- Clamp fixing system.
- Suited to countless applications.
- Backlash, vibration and maintenance free.
- Unique misalignment correction.
- High torque rigidity.

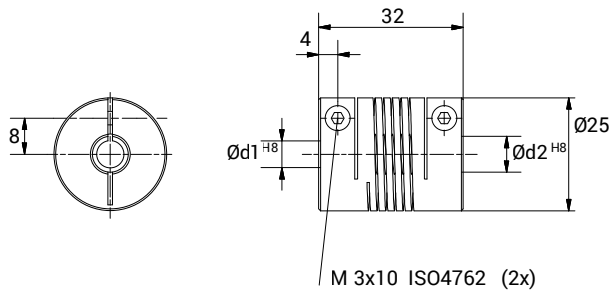

TECHNICAL DATA		
Maximum speed	min ⁻¹	6.000
Maximum torque	Nm	1
Radial misalignment max.	mm.	± 0,35
Axial misalignment max.	mm.	± 0,5
Angular misalignment max.	degree	± 4
Torsional stiffness	Nm/rad	16
Radial stiffness	N/mm	45
Moment of inertia	gcm ²	29
Clamping torque max.	Ncm	120
Working temperature range	°C	-30/+150
Weight	g	34
Material		Anodised aluminium

DIMENSIONS		
External diameter	Ø	25
Length	mm.	32
Screw thread		M 3x10
Screw position	mm.	4
S	mm.	8
Standard hole combinations d1 H8 / d2 H8	mm.	6/6 - 6/6,35 - 6/8 - 6/9,52 - 6/10 6,35/6,35 - 6,35/8 - 6,35/9,52 - 8/8 8/10 - 10/10 - 10/12