


GEAV 3038



CHARACTERISTICS

- Coupling obtained from one piece of material.
- Clamp fixing system.
- Suited to countless applications.
- Backlash, vibration and maintenance free.
- Unique misalignment correction.
- High torque rigidity.

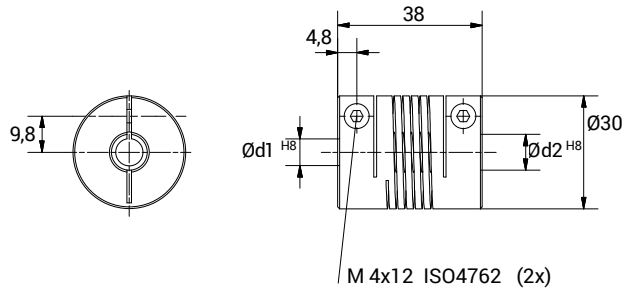

TECHNICAL DATA		
Maximum speed	min ⁻¹	6.000
Maximum torque	Nm	1,5
Radial misalignment max.	mm.	± 0,35
Axial misalignment max.	mm.	± 0,5
Angular misalignment max.	degree	± 4
Torsional stiffness	Nm/rad	19
Radial stiffness	N/mm	60
Moment of inertia	gcm ²	76
Clamping torque max.	Ncm	150
Working temperature range	°C	-30/+150
Weight	g	58
Material		Anodised aluminium

DIMENSIONS		
External diameter	∅	30
Length	mm.	38
Screw thread		M 4x12
Screw position	mm.	4,8
S	mm.	9,8
Standard hole combinations d1 H8 / d2 H8	mm.	8/8 - 10/10 - 10/12 - 12/12 - 14/14