


# GSXV 3340



## CHARACTERISTICS



- Coupling obtained from two anodized aluminium hubs with special steel bellows.
- Unique misalignment correction capacity.
- High torque rigidity.
- Backlash and vibration free.
- Outstanding servo control.
- Clamp fixing system.

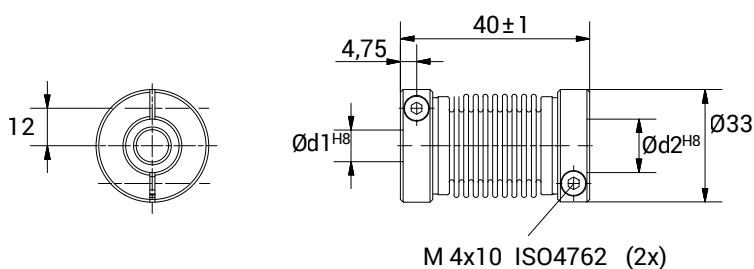

TECHNICAL DATA		
Maximum speed	min <sup>-1</sup>	15.000
Maximum torque	Nm	5
Radial misalignment max.	mm.	± 0,3
Axial misalignment max.	mm.	± 0,5
Angular misalignment max.	degree	± 3
Torsional stiffness	Nm/rad	750
Radial stiffness	N/mm	100
Moment of inertia	gcm <sup>2</sup>	82
Clamping torque max.	Nm	4
Working temperature range	°C	-40/+140
Weight	g	60
Hubs material		Anodised aluminium
Bellow material		Stainless steel

DIMENSIONS		
External diameter	Ø	33
Length	mm.	40
Screw thread		M 4x10
Screw position	mm.	4,75
S	mm.	12
Standard hole combinations d1 H8 / d2 H8	mm.	8/8 - 8/10 - 8/12 - 8/14 - 8/16 - 10/10 10/12 - 10/14 - 10/16 - 12/12 - 12/14 12/16 - 14/14 - 14/16 - 16/16